



HORIZONTAL BLIND CUT SHEET


SHOP COLLECTION – 1.5" x 1" ALUMINUM MINI BLIND HEADRAIL

Blind Options

- Dynasty Commercial Mini-Blind – 1 ½" x 1" Headrail with 6-Gauge Aluminum Slats
- Dynasty Professional Mini-Blind – 1 ½" x 1" Headrail with 8-Gauge Aluminum Slats
- Professional Mini-Blind – 1 ½" x 1" Headrail with 6-Gauge Aluminum Slats
- Estate Mini-Blind – 1 ½" x 1" Headrail with 8-Gauge Aluminum Slats

System Features

- Heavy Duty Metal and Plastic Components
- Wand Tilter has a clutch mechanism preventing over-rotation and repair



Headrail:

- Polyester baked enamel – color coordinated
- Phosphate treated steel – 1 ½" x 1" high
- Wall thickness – 0.024" (before paint)



Cord Ladder: (Color Coordinated)

- Polyester braided cord ladders are designed to ensure proper control with adequate overlap of slats when in the closed position

Valance Options: (Color Coordinated)

- Single slat valance
- Double slat valance
- Deluxe double slat valance

Cord Ladder Spacing:

- Maximum spacing between rout holes is 20"
 - Options:
 - Builder Ladder: 22.5mm
 - Contract Ladder: 21.5mm (14.2 Slats/Ft.)
 - Classic Ladder: 19.5mm (15.7 Slats/Ft.)
 - Privacy Ladder: 18.0mm (16.9 Slats/Ft.)
- Privacy ladder features an offset route hole that provides for increased light blocking.*



Bottomrail: (Color Coordinated)

- Steel – C shape
- Phosphate treated steel
- Wall thickness – 0.024" (before paint)
- Clear plastic end caps

Tilt Controls:

Wand Tilt Option



- The tilt mechanism features a clutch that prevents over-rotation and repairs
- The worm and gear arrangement is entirely enclosed inside an acetal thermoplastic housing

Lift Cords: (Color Coordinated)

- 1.4mm Polyester braided cords designed for lifting and lowering the blind


Mounting Hardware:

- Universal box brackets (color coordinated)
- Center supports on blinds wider than 60"
- Extension brackets (when requested)
- Hold down brackets (when requested)




Control Locations: (Restrictions may apply)

- Standard: Tilter – Left / Lift Cords – Right
- Reverse: Tilter – Right / Lift Cords – Left
- Same Left: Tilter – Left / Lift Cords – Left
- Same Right: Tilter – Right / Lift Cords – Right

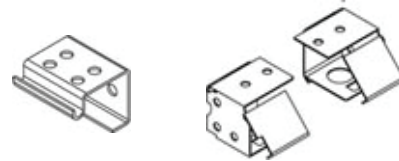

Lift Control (Cord Lock):



- Snap-in design incorporates a stainless steel wear guard over which cords pass
- Incorporates a "Crash Proof" safety feature that locks the blind automatically upon release of cords

Other Headrail Channel Hardware:

- Headrail components are made of a combination of metal and low friction acetal thermoplastics
- Snap-in design of components allows for quick and easy repair if necessary

Size Recommendations:

- Minimum Width – 9"
- Minimum Drop – 9"
- Maximum Width – 96"
- Maximum Drop – 96"

The sizes listed above are merely recommendations. Blinds may be ordered larger if required. Optional 2 or 3 blinds on a single headrail are available as well.



HORIZONTAL BLIND CUT SHEET

SHOP COLLECTION – 1.5" x 1" ALUMINUM MINI BLIND HEADRAIL

Parts

- A) Headrail (steel)
- B) Pinion Rod (Hex Tilt Rod)
- C) End Stiffeners
- D) Cord Lock
- E) Wand Tilter
- F) Ladder Drum
- G) Cradle
- H) Box Installation Bracket
- I) Slats
- J) Cord Ladder
- K) Lift Cord 1.4mm
- L) Cord Tassels
- M) Bottomrail Plugs
- N) Bottomrail – C Shape
- O) Bottomrail End Caps
- P) Slats
- Q) Cord Safety Rings
- R) Hold Down Brackets - Optional

